

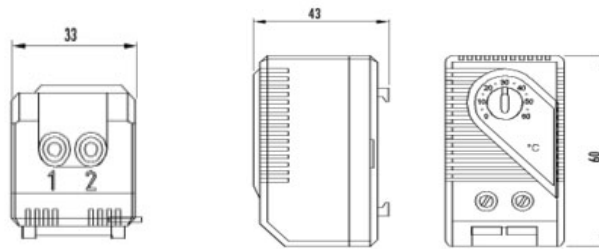
SwiftTech™

Small, Compact Thermostat



- Large setting range
- Small size
- 35mm Din Rail mount (simple to mount)
- High switching performance
- RoHS compliance



ST - DIN SERIES THERMOSTATIC BIMETEL THERMOSTAT



Specifications

Model	ST-D6001	ST-D6010
Application	Heater application 	Ventilation Fan Application 
Description	NC contact for regulating heaters	NO contact for regulating filter fans
Switch Temperature difference	7K (+4K tolerance)	
Sensor element	Thermostatic bimetal	
Contact Type	Snap - action contact	
Service Life	> 100,000 cycles	
Max. Switching capacity (resistive load)	250VAC, 10A ; 120VAC, 15A	
Connection	1.5mm ² ,2 pole Terminal, Clamping torque 0.5Nm Max	
Mounting	35mm Din Rail , EN60715	
Casing	plastic according to UL94 V-0, light grey	
Dimension	(60H x 33W x 43D) mm	
Weight	Approximate 40g	
Fitting Position	Variable	
Operating / Storage Temperature	-20°C to +80°C	
Protection type	IP20	



Swift Automation Sdn Bhd (844681 - D)

No.43G & 43-1, Jalan Suria Puchong 2, Pusat Perdagangan Suria, 47110 Puchong, Selangor Darul Ehsan. Malaysia.
Tel : +603-8959 8185 Fax : +603-8959 8186 Web : www.swiftautomation.com.my